

Vermeer®

Brush Chipper

BC2100XL



Vermeer®

BC2100XL


Believe in a Legend

With three engine options, this brush chipper delivers the power to tackle tough land clearing jobs. Two horizontal patent-pending feed rollers, a belt-tensioned cutter drum, and the largest feed table in its class turn that power into productivity. Plus, you can keep working longer with easy, low-cost maintenance.

More than just tough, this brush chipper can process limbs up to 21 inches (53 cm) in diameter and has several exclusive features that make it a smart choice as well. The BC2100XL feed rollers boast 10,000 pounds (4536 kg) of theoretical combined pulling force giving the operators the ability to pull in "whole trees" that have limbs and branches attached to the main trunk of the tree. It also helps reduce the need for repositioning the material while being fed.

Heavy-duty tandem torsion axles provide reliable off-road jobsite performance as well as decreased ground pressure for softer conditions compared to single axle designs. Taillights are mounted high above and to the sides of the infeed table and set back from the feed table for protection and improved visibility in comparison to lower-mounted designs.

Powerful, smart, and productive. It's a legendary combination you can believe in.

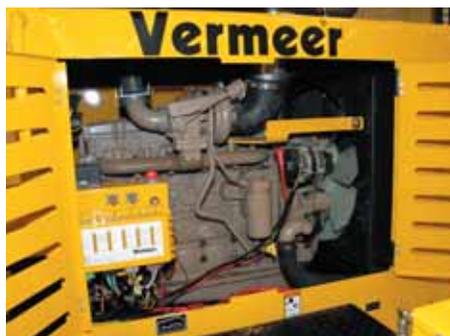


Three Cummins diesel engine options to match most jobsite needs. Options include 215 hp (160 kW), 250 hp (186 kW), or 275 hp (205 kW).

BRUSH CHIPPER



SmartCrush puts the pressure on branches. Once the upper feed roller raises for four seconds, it will automatically increase down pressure on the material being fed. This allows the upper feed roller to easily climb onto large forked material before the increased down pressure is applied for maximum pulling force.

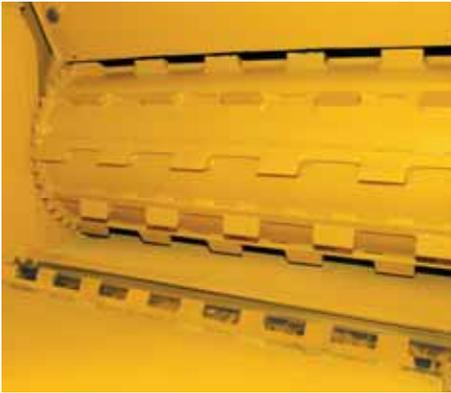

The lower feed roller is offset from the upper feed roller by 11" (28 cm). Material is easily pulled to the upper feed roller, so there is less need to manually raise the upper feed roller for larger diameter material.



Optional remote control lets one person do the work of two. Operate one machine to load while still maintaining control of the chipper. The remote control operates forward, reverse and stop functions of the feed rollers, restarting the feed rollers, engine throttle, engine stop, crush boost for the upper feed roller and hydraulic discharge chute positions (if equipped).



The SmartFeed system increases operator productivity and reduces strain on vital engine parts. A patented feed sensing control system monitors engine rpm and automatically stops or reverses the rollers when feeding larger, hardwood material. Plus, it senses feed roller jams and responds by automatically shifting material back and forth, reducing the need for manually manipulating the control bar.



The 3-year / 3,000-hour extended limited warranty on drum housings, cutter drums, shaft, and ring feeder hubs offers you peace of mind, in addition to the 1-year / 1,000-hour Vermeer equipment limited warranty.

BC2100xL Specifications

General

Weight (with outriggers): 15,000 lb (6804 kg)
Weight (without outriggers): 14,700 lb (6668 kg)
Operational length (tongue extended): 259" (658 cm)
Height (standard chute): 117" (297 cm)
Height (adjustable chute minimum): 110" (279 cm)
Height (adjustable chute maximum): 136" (345 cm)

Engine Options

Make / model: Cummins QSB 6.7L
Horsepower: 215 hp (160 kW)
Max torque: 655 ft-lb (888 Nm)
Fuel type: Diesel
Number of cylinders: 6
Cooling medium: Liquid

Make / model: Cummins QSB 6.7L
Horsepower: 250 hp (186 kW)
Max torque: 728 ft-lb (987 Nm)
Fuel type: Diesel
Number of cylinders: 6
Cooling medium: Liquid

Make / model: Cummins QSB 6.7L
Horsepower: 275 hp (205 kW)
Max torque: 730 ft-lb (990 Nm)
Fuel type: Diesel
Number of cylinders: 6
Cooling medium: Liquid

Electrical

System voltage: 12 V DC

Capacities

Fuel tank: 65 gal (246 L)
Hydraulic tank: 24 gal (90 L)

Chassis

Frame: C channel, 2.5" x 4.5" x .038"
(6.3 cm x 11.4 cm x 0.1 cm)
Tires: 235/75R17.5 load range J
Axle / suspension: Dexter tandem torsion
Hitch: 3" (7.6 cm) pintle

Cutting System

Drum system: Spherical roller bearings
Disc / drum speed: 1084 rpm
Drum size opening: 22" x 28" (56 cm x 71 cm)
Knives: 4 knives

Feed / Discharge System

Chipping capacity: 21" (53 cm)
Feed table height: 39" (99 cm)
Feed table length: 61" (155 cm)
Feed table width: 72" (cm)
Max feed speed: 100 fpm (30 m/min)
Number of feed rollers: 2 horizontal
Discharge height: 116" (295 cm)
Discharge chute rotation: 270°



The infeed table design is the largest in its class! It funnels material to the drum opening, allowing for smooth material feeding from table to drum. The overall table width is 72" (183 cm) with a 39" x 62" (99 cm x 157 cm) opening by the infeed curtains and a drum opening of 22" x 28" (56 cm x 71 cm).



Bottom feed stop bar is strategically located to make it possible for the operator to strike the bar and shut off the feed either intentionally or automatically in an emergency situation. A reset button on each side of the infeed housing allows for easy system reset if the bar is tripped.



Optional hydraulic outriggers support the back of the chipper and prevent the unit from bouncing while chipping or loading large diameter material onto the feed table.

Your Complete Global Service Provider for Quality Parts and Service



The Preventive Maintenance Plus program offers you flexibility in choosing a preventive maintenance plan that best fits your situation and service needs.



Get the parts and service edge. In addition to providing quality equipment, Vermeer delivers top-quality parts and superior service. Vermeer parts are manufactured to exacting specifications to help keep your Vermeer equipment running trouble-free and at OEM specifications.



Vermeer offers factory-certified training programs to its dealer network to ensure that the most current service procedures are presented to the service personnel of your Vermeer dealer.



Vermeer Corporation
1210 Vermeer Road East
P.O. Box 200
Pella, Iowa 50219 U.S.A.
Phone: (641) 628-3141
Fax: (641) 621-7773
International fax: +1 (641) 621-7730
www.vermeer.com

Call toll-free 1-888-VERMEER
1-888-837-6337 (U.S.A. only)

Europe, Middle East, and Africa:
P.O. Box 323
4460 AS Goes
Netherlands
Phone: +31 113 272700
Fax: +31 113 272727

Building Industry Partnerships to Serve You Better

Vermeer has forged strong strategic alliances with tree industry giants that include Sherrill Incorporated and ArborMaster. These alliances ensure that top-quality industry support is the standard at Vermeer dealerships. Membership in the TCIA and ISA helps Vermeer stay in touch with the customers it serves and the issues they face.



ArborMaster.



Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information about machine specifications. Vermeer Corporation reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacture of the unit at any time without notice or obligation. VERMEER, the VERMEER LOGO are trademarks of Vermeer Company in the U.S. and / or other countries. SHERRILL TREE is a trademark of Sherrill Incorporated. ARBORMASTER is a registered trademark of AMT.
© 2008 Vermeer Corporation. All Rights Reserved.